

## HDMI CAT5E Extender Over Single cable Series

### ITEM NO.: XLR-ACC-HDMIEXTENDER-40M

XLR-ACC-HDMIEXTENDER-40M is a CAT5e extender, passive type. The application only use to extend your DVR/NVR HDMI signal distance up to 70 meters with resolution 1024x768. It provides an easy and flexible cabling solution for HD CCTV monitoring application.



### XLR-ACC-HDMIEXTENDER-40M

- [Special design to extend HD DVR/NVR HDMI signal only.](#)
- Include Transmitter and Receiver, used in pairs via one CAT5e/6 cable to send HDMI signal.
- No external power required.
- Built in micro USB for external power when your HDMI source not able to provide enough power to the receiver.
- Support high resolution 1080p at 40M.
- Support long distance up to 70 meters at 1280x720.

### Installation:



**Transmission Distance:** The transmission distance will be affected by different DVR/NVR/ equipment and cable quality.

HE01SET to HE01SER	
Resolution/CAT5e	Distance(Meter)
1920x1200	40
1920x1080	40
1280x1024	60
1280x 720	70
1024 x768	70

## Support Resolution:


1920x1200@60Hz  
1920x1080@60Hz  
1680x1050@60Hz  
1600x1200@60Hz  
1600x900@60Hz  
1440x900@60Hz  
1280x1024@60Hz  
1280x960@60Hz  
1280x800@60Hz  
1280x720@60Hz  
1024x768@60Hz  
800x600@60Hz

## LED Indication:


Green: Power on/off  
Yellow: Reserve

## Panel View:

### Transmitter Side



### Receiver Side

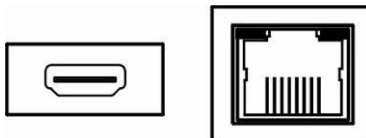

## Cable:

Video Link cable using high quality CAT5E UTP or CAT6 UTP cable, CAT6 cable enhances transmission range and signal stability. Recommend to use CAT6 cable if distance over 30M. Do not use STP cable or flat cable which may cause no video output.

## RJ45 Define:

### Video Link (use TIA/EIA-568-B)

<b>1. Orangewhite</b>	<b>TMDS DATA2 +</b>
<b>2. Orange</b>	<b>TMDS DATA2 -</b>
<b>3. Greenwhite</b>	<b>TMDS CLOCK + / HDMI 5V</b>
<b>4. Blue</b>	<b>TMDS DATA1 +</b>
<b>5. Bluewhite</b>	<b>TMDS DATA1 -</b>
<b>6. Green</b>	<b>TMDS CLOCK - / GND</b>
<b>7. Brownwhite</b>	<b>TMDS DATA0 +</b>
<b>8. Brown</b>	<b>TMDS DATA0 -</b>

## Caution:

1. The cabling must away from any equipment with electromagnetic wave, i.e.: microwave, ovens, mobile phones, radio equipment, high voltage, power line.
2. Working distance will be variety based on different equipment.
3. The wiring must be straight through, do not circle the cable to avoid crosstalk interference.
4. HDCP not supported.
5. Do not use STP cable or flat cable which may cause no video output.
6. HDMI CAT5e Extender not networking product, please do not connect with any Ethernet to avoid any damage.

## XLR-ACC-HDMIEXTENDER-40M

**HDM Transmitter x 1 piece**  
**HDMI Receiver x 1 piece**  
**MicroUSB to DC plug cable x 1 piece**

## Specification:

ITEM NO.	<b>XLR-ACC-HDMIEXTENDER-40M</b>	
Video Bandwidth	<b>2.25 Gbps (HDMI 1.3)</b>	
Resolution	<b>Up to 1920x1200@60hz</b>	
Input TMDS Video Signal	1.2 Vp-p	
Input DDC Signal	5 Vp-p (TTL)	
Link Cable Distance	<b>40M@1920x1200, 70M@1280x720</b>	
HDMI Connector	<b>HDMI Type A</b>	
Link Connector	RJ45 x 1	
Power Connector	Micro USB x 1	X
Power Consumption	320mA	
Power Supply	5V 1Amp (Optional Order)	
Temperature	Operation: -10 to 65° , Storage: -20 to 85° , Humidity: up to 85%	
Dimension	mm	<b>57.5 x 24 x 20.2</b>
Weight	g	<b>20</b>

RoHS CE FC 

RevA